χαρακτηριστικά

high elasticity

high adhesion

high strength

high transpiration

fast setting

wall use

commercial spaces

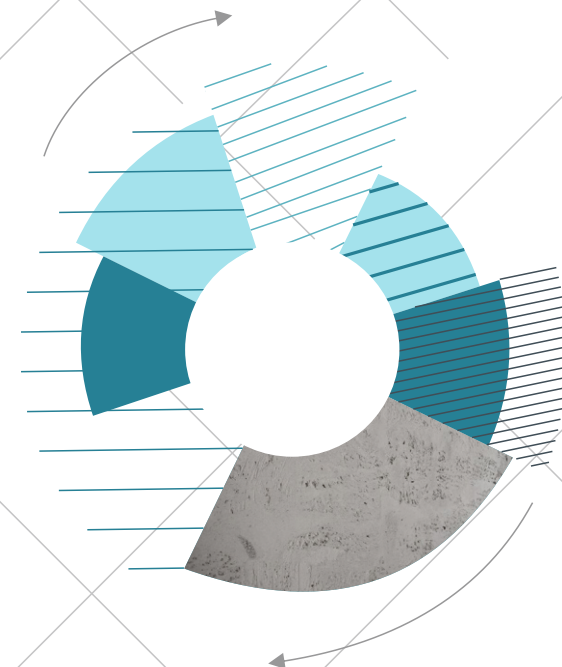cafè restaurants

offices

furniture

residences

εφαρμογές
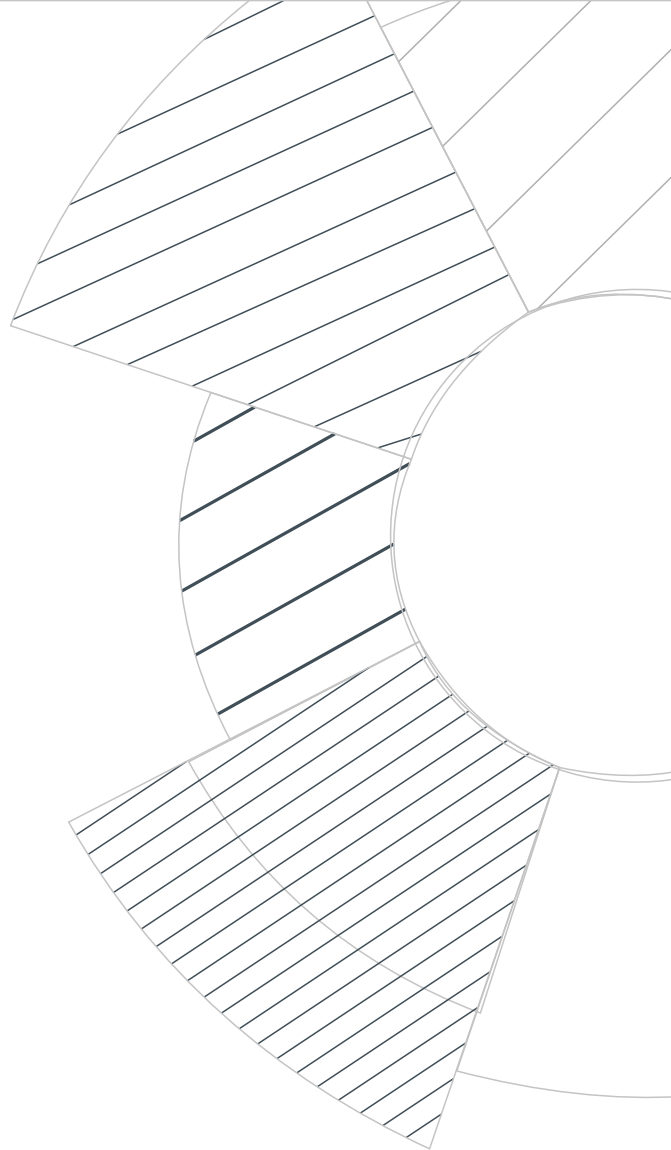
ƎLƎMƎNT:20

QUALITY MORTARS

CEMENT PLUS ®

Black Series

fair-faced concrete

info : ELEMENT:20

Ensure that
the substrate is
level, compact, dry
(humidity ⩽3%),
free from dust and stains.
If substrate is rough,
use smoothing,
fast setting skin-coat
D-base 60,
in case of cracks
proceed in full
restroration.

Apply the
quartz primer
C Primer Plus
on the surface.
Consumption
8-12 m²/kg.

3 to 8 hours later,
(depending on the
weather conditions)
prepare the
Element 20
by mix it with
25-30% water.

Apply the
material on the
surface, using a
trowel to create
a uniform layer
and cover completely
the substrate.
Application thickness
2-3 mm.

Straight after the
application of
Element 20,
use the special tool
(grass) to create
a surface with
peakes and pores.

15′ to 45′ later,
before the surface
dries, smoothen
the peakes with
a trowel, in order
to obtain the
desired pores
on the surface.

4 to 24 hours
later, apply by
sprayer, one layer
of the acrylic
waterproofing
sealer **COLORTEC**.
Consumption
100gr/m².

3-8 hours

15-45 minutes

4-24 hours